




# ALLOY DEE & BOW SHACKLES

Lifting shackles generally to US Fed. Spec. RR-C-271

- Screw Pin and Safety (Bolt, Nut and Split Pin) Shackles
- Safety Factor: 5:1
- Material: Bow and pin high tensile steel, Grade 6
- Standard: Generally to US Fed. Spec. RR-C-271
- Finish: Hot dipped galvanized (Nuts on small sizes electro-galvanized)
- All measurements approximate and subject to tolerances

## SPECIFICATIONS

Dee & Bow SWL Short Tons	Dee & Bow Body Diameter mm	Dee & Bow Pin/Bolt Diameter mm	Dee & Bow Inside Width at Pin mm	Bow Only Inside Width at Bow mm	Dee Only Inside Length mm	Bow Only Inside Length mm	Dee Only Approx. Weight kg	Bow Only Approx. Weight kg
0.5	6	8	12	19	23	27	0.05	0.05
0.75	8	10	13	21	20	31	0.08	0.10
1	10	11	17	26	33	37	0.11	0.14
1.5	11	13	18	29	37	44	0.18	0.19
2	13	16	20	33	46	48	0.27	0.29
3.25	16	20	27	43	52	61	0.55	0.63
4.75	20	22	30	51	61	71	1.02	1.06
6.5	22	25	36	58	76	84	1.43	1.53
8.5	25	28	44	67	83	95	2.16	2.42
9.5	28	32	47	73	91	107	3.06	3.09
12	32	35	52	81	101	119	4.11	4.31
13.5	35	38	58	91	118	134	5.28	6.02
17	38	42	61	98	125	144	7.24	8.04
25	44	51	74	126	150	180	12	14
35	51	56	85	143	170	197	19	21
55	64	70	105	184	203	267	33	39
85	76	85	128	215	215	315	56	70
120	89	95	133	230	240	365	98	120
150	102	108	141	250	-	375	-	140

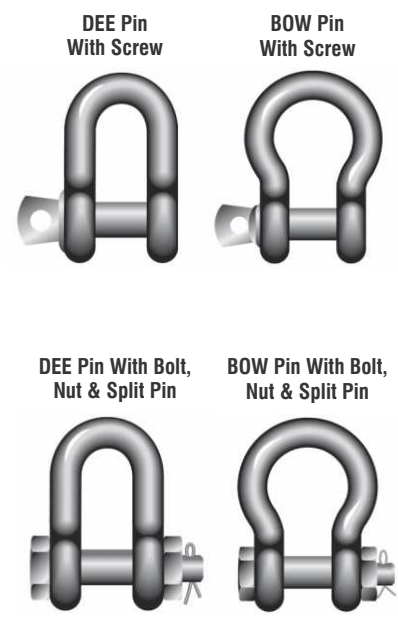

# LARGE DEE SHACKLES

Shackles generally to British Standard Specification B.S. 3032

- Material: Bow and pin alloy steel, EN14a
- Safety Factor: 4:1
- Standard: Generally to B.S. 3032
- Finish: Hot dipped galvanized, electro-galvanized or self colour
- All measurements approximate and subject to tolerances

## SPECIFICATIONS

SWL Metric Tons	Body Diameter mm	Pin Diameter mm	Inside Width mm	Inside Length mm	Approx. Weight kg
0.5	10	12	19	38	0.17
0.75	13	16	25	46	0.35
1.5	16	19	32	68	0.66
2	19	22	38	73	1.02
3	22	24	44	80	1.57
3.75	25	28	50	94	2.3
5	28	32	55	101	3.2
6	32	36	61	112	4.3
7	35	38	67	127	5.4
9.5	38	44	70	137	6.8
13	44	51	83	156	11.0
16.25	51	57	98	187	20.0
20	57	64	110	210	26.8

Large Dee Shackle



Due to our policy of continual product development, dimensions, weights and specifications may change without prior notice. Please check with your sales representative when ordering.